


Mobile Electrostatic Spray Cart

The AQUAOX™ ICS air-assisted electrostatic sprayer efficiently applies our EPA registered disinfecting solutions on and around all surfaces for a complete and effective disinfecting coverage.

- Compact, unobstructive sprayer
- Durable wheeled case with extendable handle
- Includes one ESS Electrostatic Spraygun
- Self-contained. Does not require an external air supply
- Internal tank holds enough solutions for 5 hours application (min)
- Quiet operation
- Non-removable tank with drain hose and valve

Technical Specifications

Power supply	115V 60 hz 220V (Option)
Tank	5 gal. (18.9 L)
Size	36" H x 15" W x 15" D (91.4 cm. x 38 cm x 38 cm)
Hose	25 ft. (7.6 m)
Flow Rate	0 - 2 oz./min.
Weight: Full Empty	73 lbs. (33 kg) 32 lbs. (14.5 kg)
Droplet size	40 micron VMD
Spray range	Up to 8 ft. (2.4 m)
Electrical cord	1 ft. (.3 m)

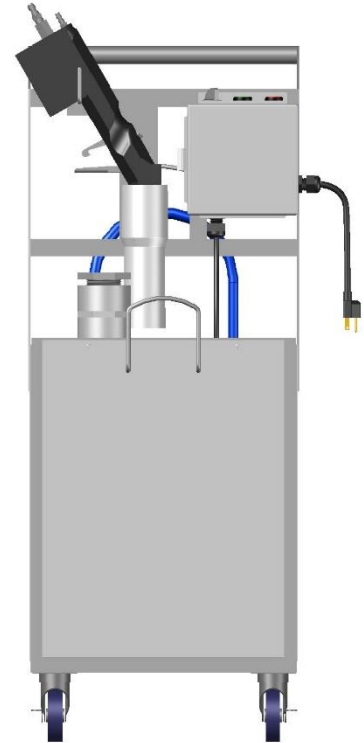

Patented air-atomizing
 Induction-charging
 nozzle